


2497LF ▲

Submitted Model No.: _____

Specific Features: _____

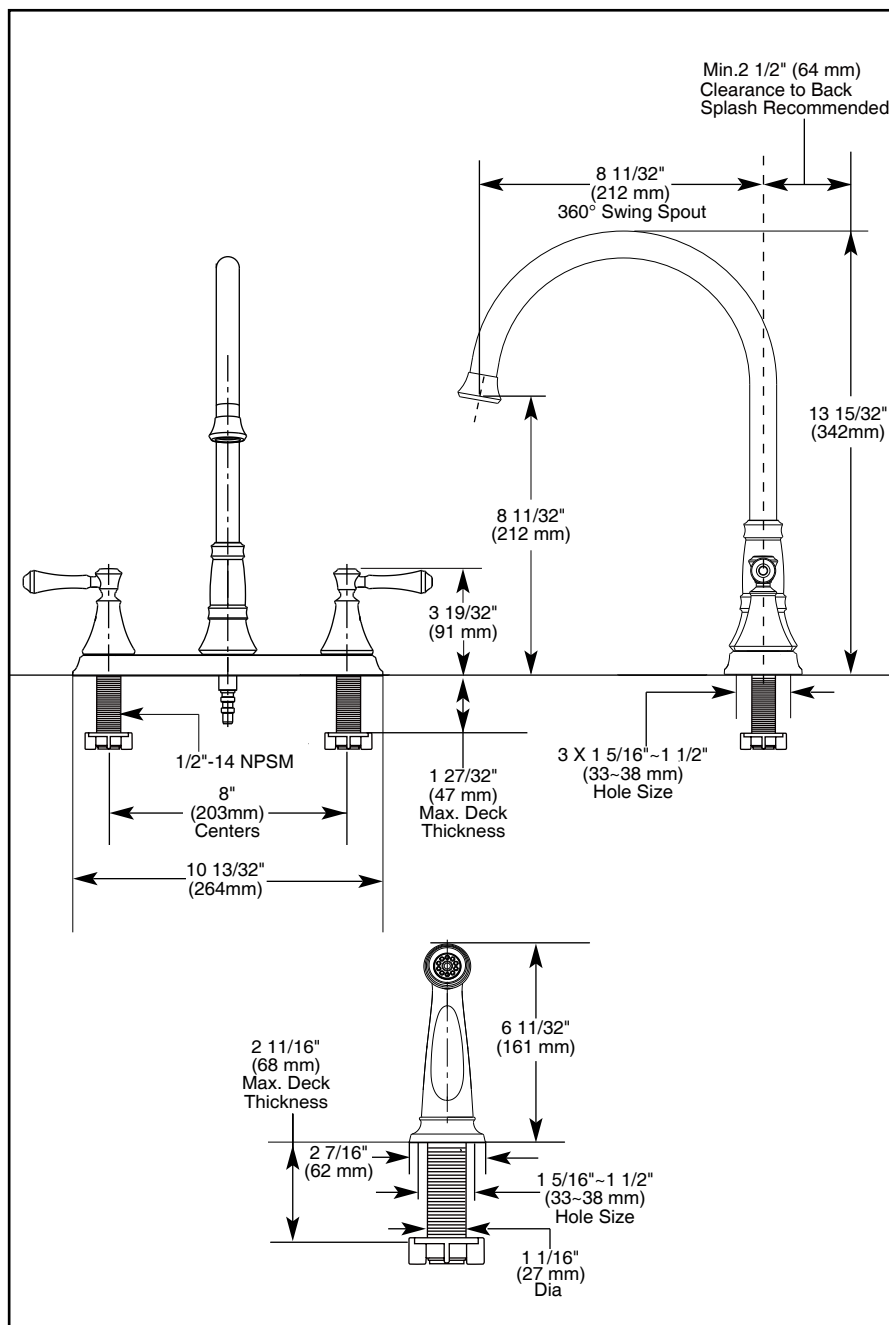

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See full-line price book or www.specselect.com for finish options and product availability.

DSP-K-2497LF Rev. A



KITCHEN FAUCET

- Cassidy™ Series
- Two Handle Deck Mount
- 3 or 4 Hole Sink Application

STANDARD SPECIFICATIONS

- Solid brass fabricated body.
- Two handle kitchen faucet for exposed mounting on 4 hole sinks with 8" centers.
- 8 21/32" (220 mm) long, 13 15/32" (342 mm) high spout swings 360°.
- Hot and cold stems are interchangeable
- Metal lever handle with 1/4 turn handle stops.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2" -14 NPSM threaded male inlet shanks.
- Model with spray attachment has antisiphon device as integral part of valve body.
- Min 2 1/2"(64mm) clearance to back splash recommended.
- Maximum flow rate 1.8 gpm @ 60 PSI.
- 3 hole installation requires RP40301.

WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the Original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all Industrial' Commercial and Business applications.



COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC / ANSI A117.1
- CSA Certified

Verified compliant with 0.25% weighted average Pb content regulations.

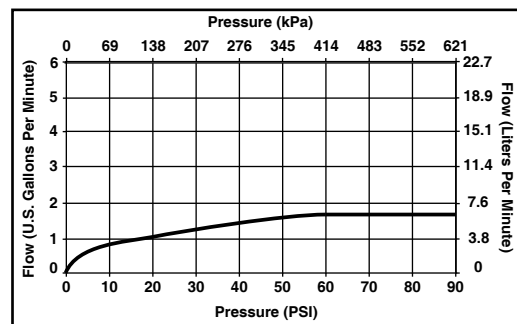

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
© 2011 Masco Corporation of Indiana