



NES Series Water Softeners



...THE NEXT GENERATION

www.sterlingwatertreatment.com

LOADED WITH FEATURES



EASY TO PROGRAM

JUST PUSH THE BUTTON TO SET
THE TIME OF DAY AND HARDNESS...

YOU'RE DONE!

CONTROL VALVE DESIGNED FOR
MINIMUM WATER AND SALT USAGE.

OPTIONAL ADVANCED PROGRAMMING

ADJUSTMENT OF EACH CYCLE
DURATION; REGENERATION
TIME; AND DAYS OVER-RIDE

RUGGED RESIN TANK

FIBERGLASS CONSTRUCTION,
WILL NEVER RUST OR CORRODE

VORTEX DISTRIBUTOR

SCRUBS THE RESIN EACH
REGENERATION TO EXTEND
THE LIFE OF THE SOFTENER

SELF LEVELING BASE

COMPENSATES FOR
UNLEVEL FLOOR

SAFETY BRINE VALVE

ELIMINATES MESSY
OVERFLOW SHOULD A
MALFUNCTION OCCUR

SALT SHELF

ALLOWS THE USE OF INEXPENSIVE
SALT AND REDUCES THE CHANCE OF
SALT BRIDGING AND MUSHING



EASY TO INSTALL... EASY TO SERVICE

RUGGED VALVE

MOTORIZED PISTON FOR YEARS OF TROUBLE FREE SERVICE

QUICK RELEASE DRAIN FITTING

NO THREADS TO LEAK.
MERELY PULL CLIP TO
REMOVE DRAIN FITTING



PUSH-IN BRINE LINE FITTING

ELIMINATES CONFUSING
FERRULES AND NUTS
THAT CAN CAUSE LEAKS



STAINLESS STEEL BYPASS

OPERATES WITH SINGLE
HANDLE. 3/4" FEMALE
THREADS

NES SERIES

SPECIFICATIONS

Model Number	Grain Capacity		Service Flow Rate (gpm)		Salt Storage (lbs.)	Dimensions *Inlet Height				Pipe Size
	Max.	Min.	Peak	Service		A	*B	C	D	
NES-0.75-S	22,500	21,000	12	6	200	52"	45.75"	23"	15"	3/4" or 1" (-1S suffix)
NES-1-S	30,000	24,000	13	8	200	56"	49.75"	24"	15"	
NES-1.5-S	45,000	33,000	13	10	200	62"	56"	25"	15"	
NES-2-S	60,000	48,000	14	12	200	56"	49.75"	27"	15"	
NES-2.5-S	75,000	48,500	15	14	200	62"	56"	32"	18"	


SPACE-MAKER

Model Number	Grain Capacity		Service Flow Rate (gpm)		Salt Storage (lbs.)	Dimensions *Inlet Height				Pipe Size
	Max.	Min.	Peak	Service		A	*B	C	D	
NECS-0.75-S	22,500	21,000	14	6	150	43"	36.50"	23"	13"	3/4"
NECS-1-S	30,000	24,000	14	8	150	43"	36.50"	23"	13"	3/4"

NOTE: Service flow rate of control valve (only) is 20gpm @ 15 psig drop.



NECS

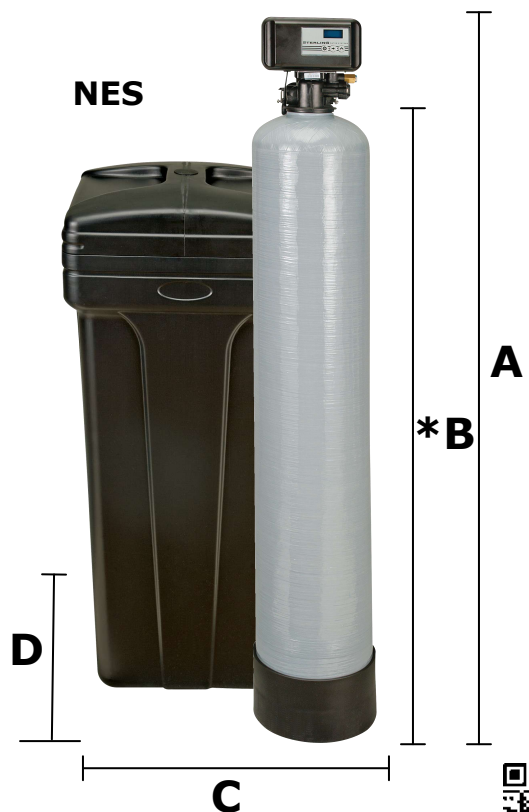

NES

