

Connectors



QF - "Quick-Fix"

Just screw on tightly and it won't come off. For 1/2", 9/16", 5/8" and 3/4" cables.



RS - Repair Sleeve

In 3/8", 1/2", 5/8", and 3/4" sizes. (weld on)



FC-O - Female Connectors

3/8", 1/2", 5/8", and 3/4" sizes. (weld on)



MC-O - Male Connectors

3/8", 1/2", 5/8", and 3/4" sizes. (weld on)



Screw-in Connectors and Splicers

5/8" and 3/4"
(Wire rope center must be removed with 1/8" drill bit rotating at very slow speed.)



Snake Oil™

It protects your cables better than common lubricants. Its special rust inhibitor cuts through moisture and replaces it with a rust-resistant coating. In addition, Snake-Oil gives your equipment a fresh, clean smell. Available in quarts and gallons.

Cables

Sectional Cables

Quick coupling "Cable Saver" sectional cables for the Model 88. Choose from two coupling styles. Both snap together in a second and are taken apart quickly with a spanner wrench or even a screwdriver. With the more recently developed "G" connector, no torque is put on the locking pin when running in reverse, making it a very durable coupling.



Flexichain™ Sections

1-1/4" outer spring wrapped around a chain center gives unmatched flexibility to get through tight traps and difficult bends, while providing maximum protection against losing broken cables in a line. Outer spring is right-hand wound for faster feeding. Available in 8 and 10 ft. lengths with "G" or "L" connectors.



Proflex™ Sections

Combination of 1-1/4" outer spring with 1/2" Proflex inner spring to better handle motor torque and have better "push" when working through tough stoppages. Outer spring is right-hand wound and inner spring is left-hand wound for greater strength and durability. Available in 4, 8 or 10 foot sections with "G" or "L" connectors.



Heavy Duty Proflex™ Sections

Same 1-1/4" outer spring as the Proflex but with a 5/8" heavy duty inner spring to provide more torque for difficult stoppages and longer runs. Available in 10 foot sections with "G" or "L" connectors.



6 ft. x 7/8" Proflex™ Sections (Cat # 6L78)

For 2" to 4" drain lines up to 100 ft. long. It combines a 6 ft. x 7/8" outer cable with 7/16" Proflex inner spring giving you the flexibility to get through small lines with the strength to resist kinking. For use with the Model 88 using the 78L-CDC Drive Coupling or the 78L-AD Adapter. Available with "L" connector.




Flexicore® Cable

Wire Rope Center Construction

Heavy-gauge wire coiled tightly around 49-strand aircraft-type wire rope and heat treated. Has unequalled strength and the right amount of flexibility. So tough it carries a one-year warranty against defect or breakage.

Flexicore Patent Nos.
2,244,735 and 2,849,870

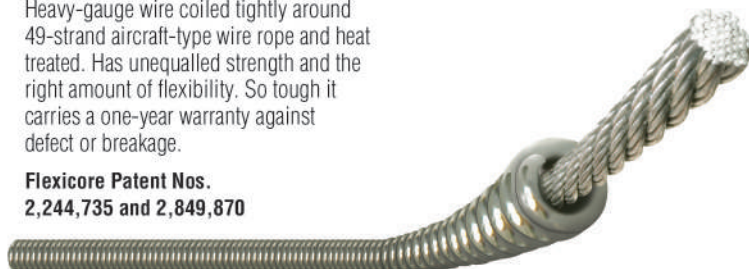

General General Wire Spring Co.
PIPE CLEANERS
McKees Rocks, PA 15136 USA
800-245-6200 or 412-771-6300