



Basic Catalog	Scale Size	Stem Length
SX935	9	3.5
SX960	9	6
SX735	7	3.5
SX760	7	6

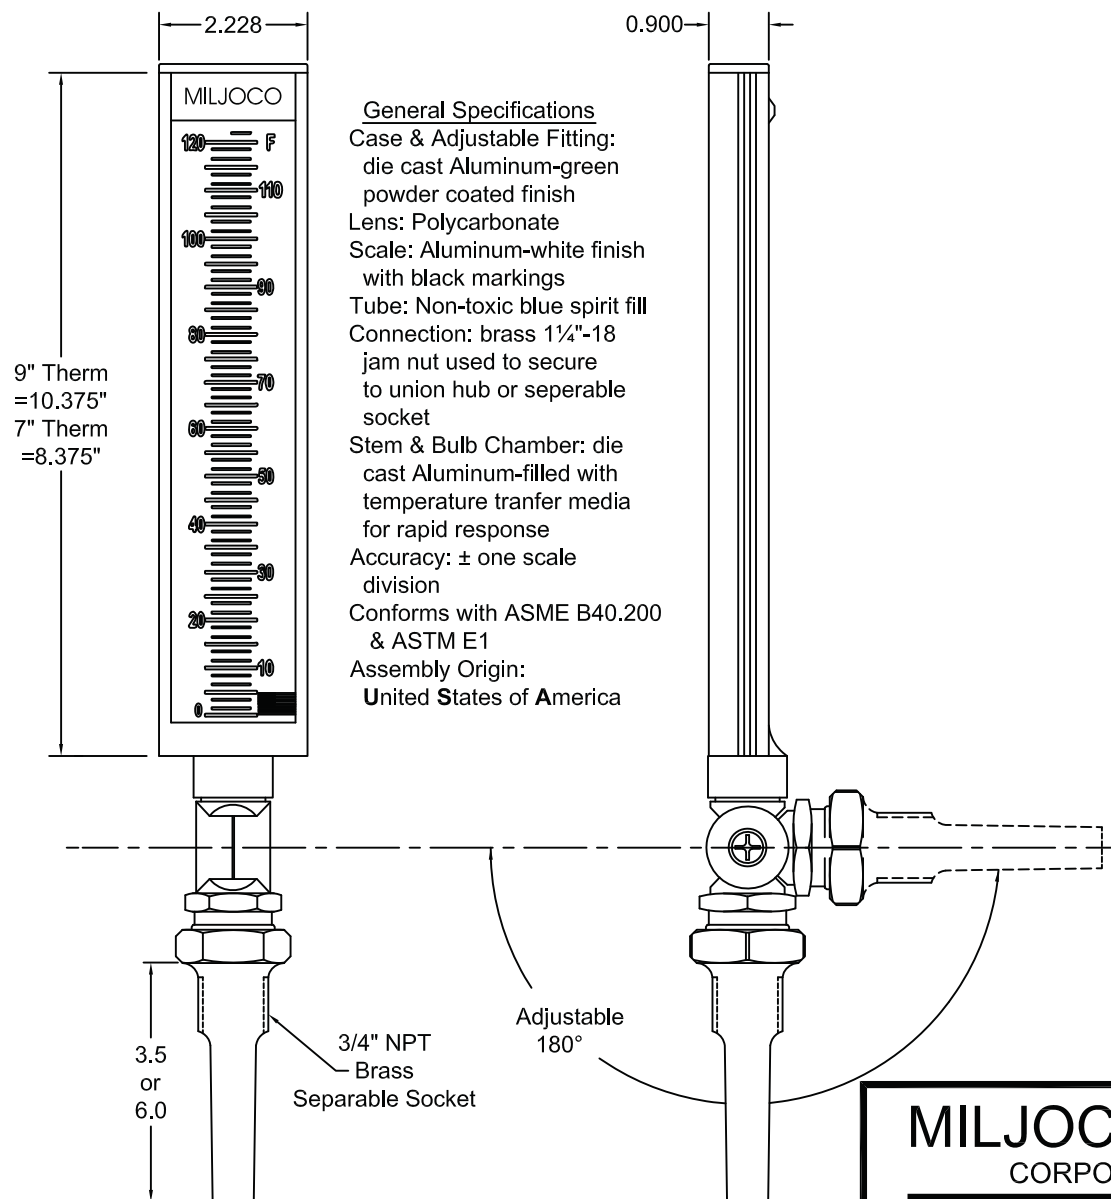

General Specifications
Case & Adjustable Fitting:
die cast Aluminum-green
powder coated finish
Lens: Polycarbonate
Scale: Aluminum-white finish
with black markings
Tube: Non-toxic blue spirit fill
Connection: brass 1 1/4"-18
jam nut used to secure
to union hub or seperable
socket
Stem & Bulb Chamber: die
cast Aluminum-filled with
temperature tranfer media
for rapid response
Accuracy: $\pm$ one scale
division
Conforms with ASME B40.200
& ASTM E1
Assembly Origin:
United States of America



Code	Range	°F Scale		°C Scale	
		Fig.	Div.	Fig.	Div.
30	-40 to 110°F	10°	2°	See Dual Scale Ranges Below	
35	0 to 120°F	10°	1°		
75	0 to 160°F	10°	2°		
77	30 to 180°F	10°	2°		
50	30 to 240°F	10°	2°		
60	30 to 300°F	10°	2°		
100	50 to 400°F	25°	5°		
97	50 to 550°F	50°	5°		
31	-40 to 110°F / -40 to 40°C	20°	2°	10°	1°
36	0 to 120°F / -10 to 50°C	20°	1°	10°	1°
76	0 to 160°F / -15 to 70°C	10°	2°	5°	1°
88	30 to 180°F / 0 to 80°C	10°	2°	5°	1°
51	30 to 240°F / 0 to 115°C	20°	2°	10°	1°
61	30 to 300°F / 0 to 150°C	20°	2°	10°	1°
101	50 to 400°F / 10 to 205°C	50°	5°	10°	2°
102	50 to 550°F / 10 to 288°C	100°	5°	20°	2°

*Add Range No. to Cat. No (example SX93530)

Customer: _____
Project: _____
Engineer: _____
Pro or PO#: _____

MILJOCO

CORPORATION 200 Elizabeth Street, Mt. Clemens, Michigan 48043 USA

SCALE: None	APPROVED BY:	DRAWN BY: HMT
DATE: 6/26/02		REVISED: 2/18/05
7" & 9" Industrial Thermometer		
.XX $\pm$.010 .XXX $\pm$.005	MODEL NUMBER: SX9/SX7	DRAWING NUMBER: 127-52