For Residential and Commercial Applications

Job Name: Engineer/Architect:

Job Location: Wholesaler:

Submittal Date: Contractor:

G2CR19X Matte Black 1/4 Turn Angle Stop - Compression x Compression

Use: For use in potable water distribution systems in accessible locations only.

Design Features:


- Attractive matte black finish.
- **Positive 1/4 turn** shut off provides easy on/off operation.
- Easy-to-remove handle helps protect against accidental operation during rough-ins.
- 100% leak-tested.
- Precision-machined brass ball is specially engineered and mated with PTFE seats to provide smooth operation.
- No-lead brass material meets compliance for safe drinking.




Temperature: 40°- 160° F

Pressure: 125 PSI maximum

| STOP MATERIAL SPECIFICATIONS | | |
|------------------------------|-------------------------|--|
| Body | Brass, plated | |
| Stem | Brass | |
| Ball | Brass, plated | |
| Seats | PTFE | |
| O-ring | Rubber | |
| Handle | ABS, plated | |
| Handle Screw | Stainless steel, plated | |
| Compression Nut | Brass, plated | |
| Compression Sleeve | Brass | |

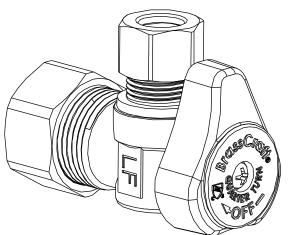

G2CR19X Matte Black 1/4 Turn Angle Stop - Compression x Compression

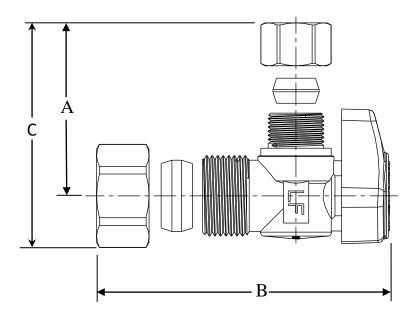



| F | | | | |
|---------|-------|-------|-------|-------|
| Model | DIM A | DIM B | DIM C | DIM D |
| G2CR19X | 1.12 | 2.24 | 1.63 | 1.09 |

Part Listing:

G2CR19X MBD 1/2" Nom Compression x 3/8" OD Compression, Matte Black Finish, Blister Card

Listings & Certifications:

 IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)





