For Residential and Commercial Applications

Job Name:	Engineer/Architect:
Job Location:	Wholesaler:
Submittal Date:	Contractor:

KTBRPX14X 1/4 Turn Straight Ball Stop – Barbed PEX x Compression

For use in potable water distribution systems in accessible locations only.

Design Features:

- Machined brass ball is specially engineered and mated with PTFE seats to provide smooth operation.
- Two high-performance o-rings withstand high temperatures and corrosion.
- Machined, one-piece brass body provides strength, durability and long-lasting performance.
- Brass stem is assembled from the inside out with two o-rings to ensure safe, reliable performance.
- Plated stem provides corrosion resistance and prevents o-ring damage.
- Metal handle is designed for durability, corrosion resistance and a sleek appearance.
- Easy-to-remove handle with screw attachment helps protect against accidental stop operation during rough-ins.
- 100% leak tested.
- PEX end designed to ASTM F180.7.
- For use with ASTM F876 PEX tubing, in ASTM F877 water distribution systems using ASTM F1807 and/or F2098 connection methods.
- No-lead brass material meets compliance for safe drinking.


Operating Specifications:

Temperature: 40°-180°F


125 PSI maximum Pressure:

STOP MATERIAL SPECIFICATIONS		
Body	Brass, plated	
Stem	Brass, plated	
Seat	PTFE	
Ball	Brass, plated	
O-ring	Rubber	
Handle	Zinc die cast, plated	
Handle Screw	Steel, zinc plated	
Compression Nut	Brass, plated	
Compression Sleeve	Brass	





400.16 KTBRPX14X 1/4 Turn Straight Ball Stop - Barbed PEX x Comp REV 9.25






KTBRPX14X 1/4 Turn Straight Ball Stop – Barbed PEX x Compression

Part Listing:

KTBRPX14X C

1/2" Nom Crimp Barb x 3/8" OD Compression, Chrome Plated

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	
KTBRPX14X	1.14	2.22	

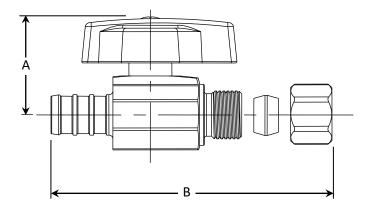

Listings & Certifications:

 IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.



