

For Residential and Commercial Applications

Job Name: Engineer/Architect:
Job Location: Wholesaler:
Submittal Date: Contractor:

B1-**A/B2-**A/B3-**A Speedi Plumb® PLUS Braided Faucet Connector - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:


- **Engineered polymer braided** fibers bend freely without kinking or crimping.
- **Reinforced PVC inner hose** provides added durability.
- **Rubber washers** provide a large pliable sealing surface and to help maintain a water-tight connection.
- **No-lead brass material** meets compliance for safe drinking.

Operating Specifications:


Temperature: 40°- 160° F, intermittent to 180° F
Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)

CONNECTOR MATERIAL SPECIFICATIONS	
Inner Hose	Reinforced PVC
Braiding	PVC coated yarn
Barb	Brass
Ferrule	Stainless steel
Nut	Brass, plated
Washer	Rubber

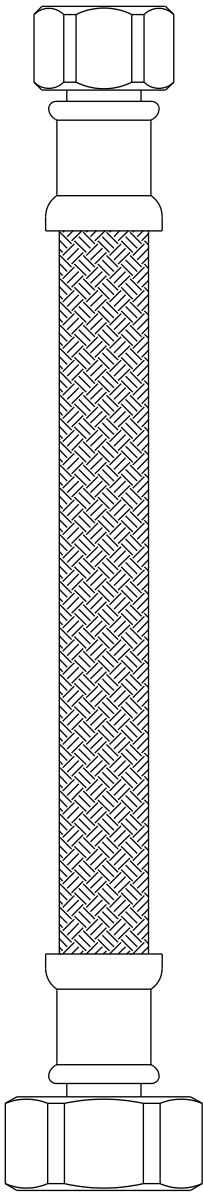

B1-**A/B2-**A/B3-**A Speedi Plumb® PLUS Braided Faucet Connector - Compression Inlet

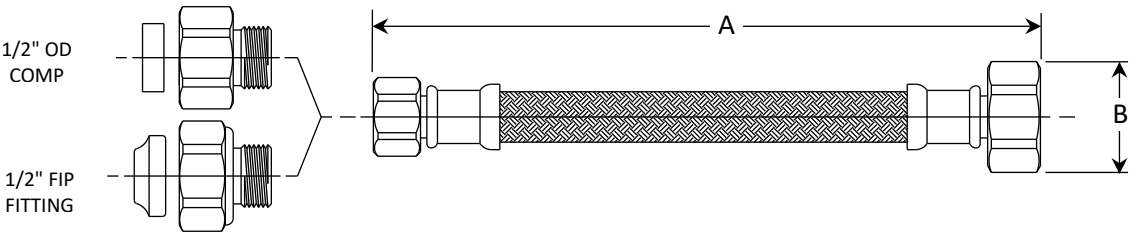

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
B1-12	12.0 / 13.0	1.02
B1-16	16.0 / 17.0	1.02
B1-20	20.0 / 21.0	1.02
B1-24	24.0 / 25.0	1.02
B1-30	30.0 / 31.0	1.02
B1-36	36.0 / 37.0	1.02
B1-48	48.0 / 49.0	1.02

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
B1-60	60.0 / 61.0	1.02
B2-12	12.0 / 13.0	1.02
B2-20	20.0 / 21.0	1.02
B3-12	12.0 / 13.0	1.02
B3-16	16.0 / 17.0	1.02
B3-20	20.0 / 21.0	1.02
B3-30	30.0 / 31.0	1.02

Part Listing:

- ☐ B1-12A F
- ☐ B1-16A F
- ☐ B1-20A F
- ☐ B1-20A P8
- ☐ B1-20AU D
- ☐ B1-20AMB F
- ☐ B1-24A F
- ☐ B1-30A F
- ☐ B1-36A F
- ☐ B1-48A F
- ☐ B1-60A F
- ☐ B2-12A F
- ☐ B2-20A F
- ☐ B3-12A F
- ☐ B3-16A F
- ☐ B3-20A F
- ☐ B3-30A F
- 3/8" Compression x 1/2" FIP* x 12" Length
- 3/8" Compression x 1/2" FIP* x 16" Length
- 3/8" Compression x 1/2" FIP* x 20" Length
- 3/8" Compression x 1/2" FIP* x 20" Length, bagged, 8-pack
- 3/8" Compression x 1/2" FIP* x 20" Length Connector with 1/2" OD Compression and 1/2" Iron Pipe Valve Adaptors, and Washers, Carded
- 3/8" Compression x 1/2" FIP* x 20" Length, Matte Black Finish
- 3/8" Compression x 1/2" FIP* x 24" Length
- 3/8" Compression x 1/2" FIP* x 30" Length
- 3/8" Compression x 1/2" FIP* x 36" Length
- 3/8" Compression x 1/2" FIP* x 48" Length
- 3/8" Compression x 1/2" FIP* x 60" Length
- 7/16" Compression x 1/2" FIP* x 12" Length
- 7/16" Compression x 1/2" FIP* x 20" Length
- 1/2" Compression x 1/2" FIP* x 12" Length
- 1/2" Compression x 1/2" FIP* x 16" Length
- 1/2" Compression x 1/2" FIP* x 20" Length
- 1/2" Compression x 1/2" FIP* x 30" Length

*1/2" FIP also fits 7/16" rubber slip nut

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF/ANSI 372 for Low-Lead Compliance
- IAPMO listed to NSF/ANSI/CAN 61



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft®. This specification must be returned to BrassCraft if requested.