

Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
REPRESENTATIVE: _____	TYPE OF SERVICE:	DATE: _____
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:




UPS 15-55 SFC


UPS N is a three-speed circulator pump with a corrosion-free stainless-steel pump housing which is recommended for domestic hot-water recirculation and underfloor heating systems.

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
Liquid: Water	Liquid temperature range: 35.6 .. 230 °F	Max. power input: 87 W
Temperature: 140 °F	Maximum ambient temperature: 104 °F	Mains frequency: 60 Hz
Specific Gravity: 0.985	Type of connection: S.S. Flange	Thermal protection: IMP.
	Pipe connection: 2-BOLT FLANGE	
	Product number: 59896773	

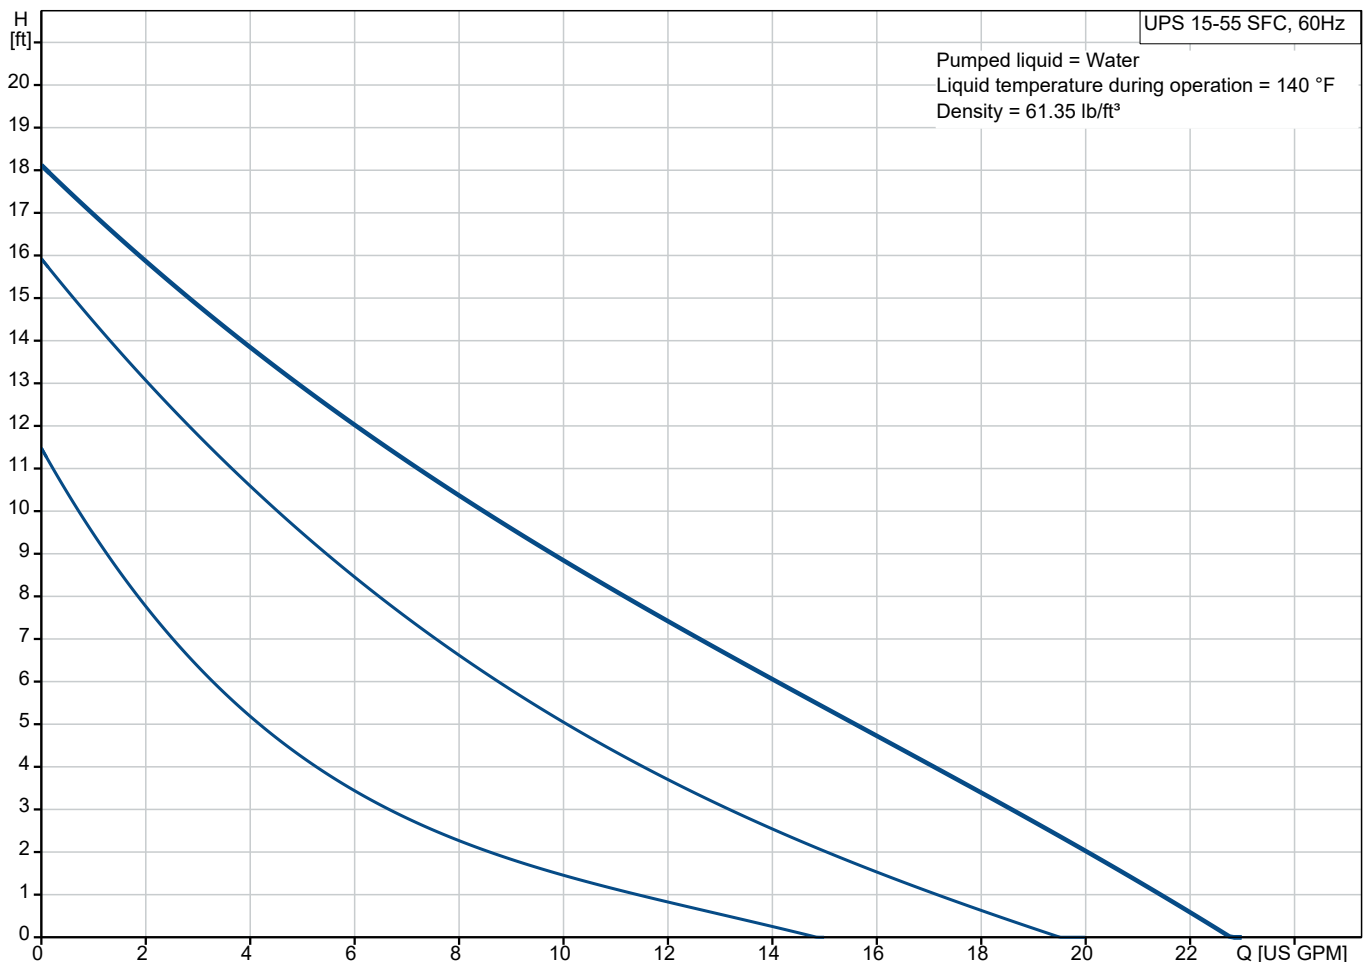

Submittal Data

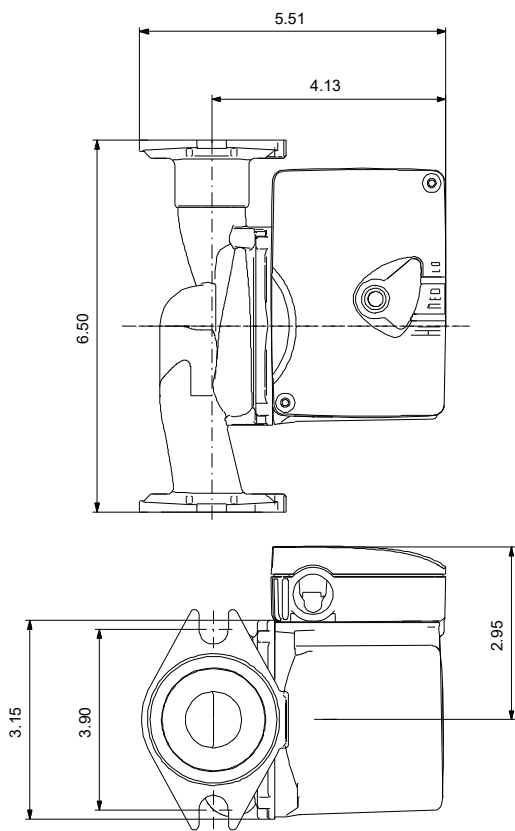

Materials:
Pump housing: Stainless steel
Pump housing: AISI 304
Impeller: Composite

Qty.	Description
1	UPS 15-55 SFC Note! Product picture may differ from actual product Product No.: 59896773 Grundfos UPS N circulator pumps have a corrosion-free stainless-steel pump housing and are recommended for domestic hot-water recirculation and underfloor heating systems. UPS N can be connected to an on/off time switch to limit pump operation to periods when hot water is usually required. The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. The pump is characterized by: • Ceramic shaft and radial bearings. - Carbon axial bearing. - Stainless steel rotor can and bearing plate.

