

PROJECT:	UNIT TAG:	QUANTITY:
REPRESENTATIVE:	TYPE OF SERVICE:	
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:





UPSe 15-58 F

UPSe is a high-efficiency circulator designed for heating systems. It offers high energy savings compared to traditional non-ECM pumps and three control modes that make it suitable for any heating application.

Note! Product picture may differ from actual product

Conditions of Service		Pump Data		Motor Data	
Liquid:	Water	Maximum operating pressure:	175.0 PSI	Mains frequency:	60 Hz
Temperature:	140 °F	Liquid temperature range:	35.6 .. 230 °F		
Specific Gravity:	0.985	Maximum ambient temperature:	131 °F		
		Pipe connection:	GF 15/26		
		Product number:	92603106		

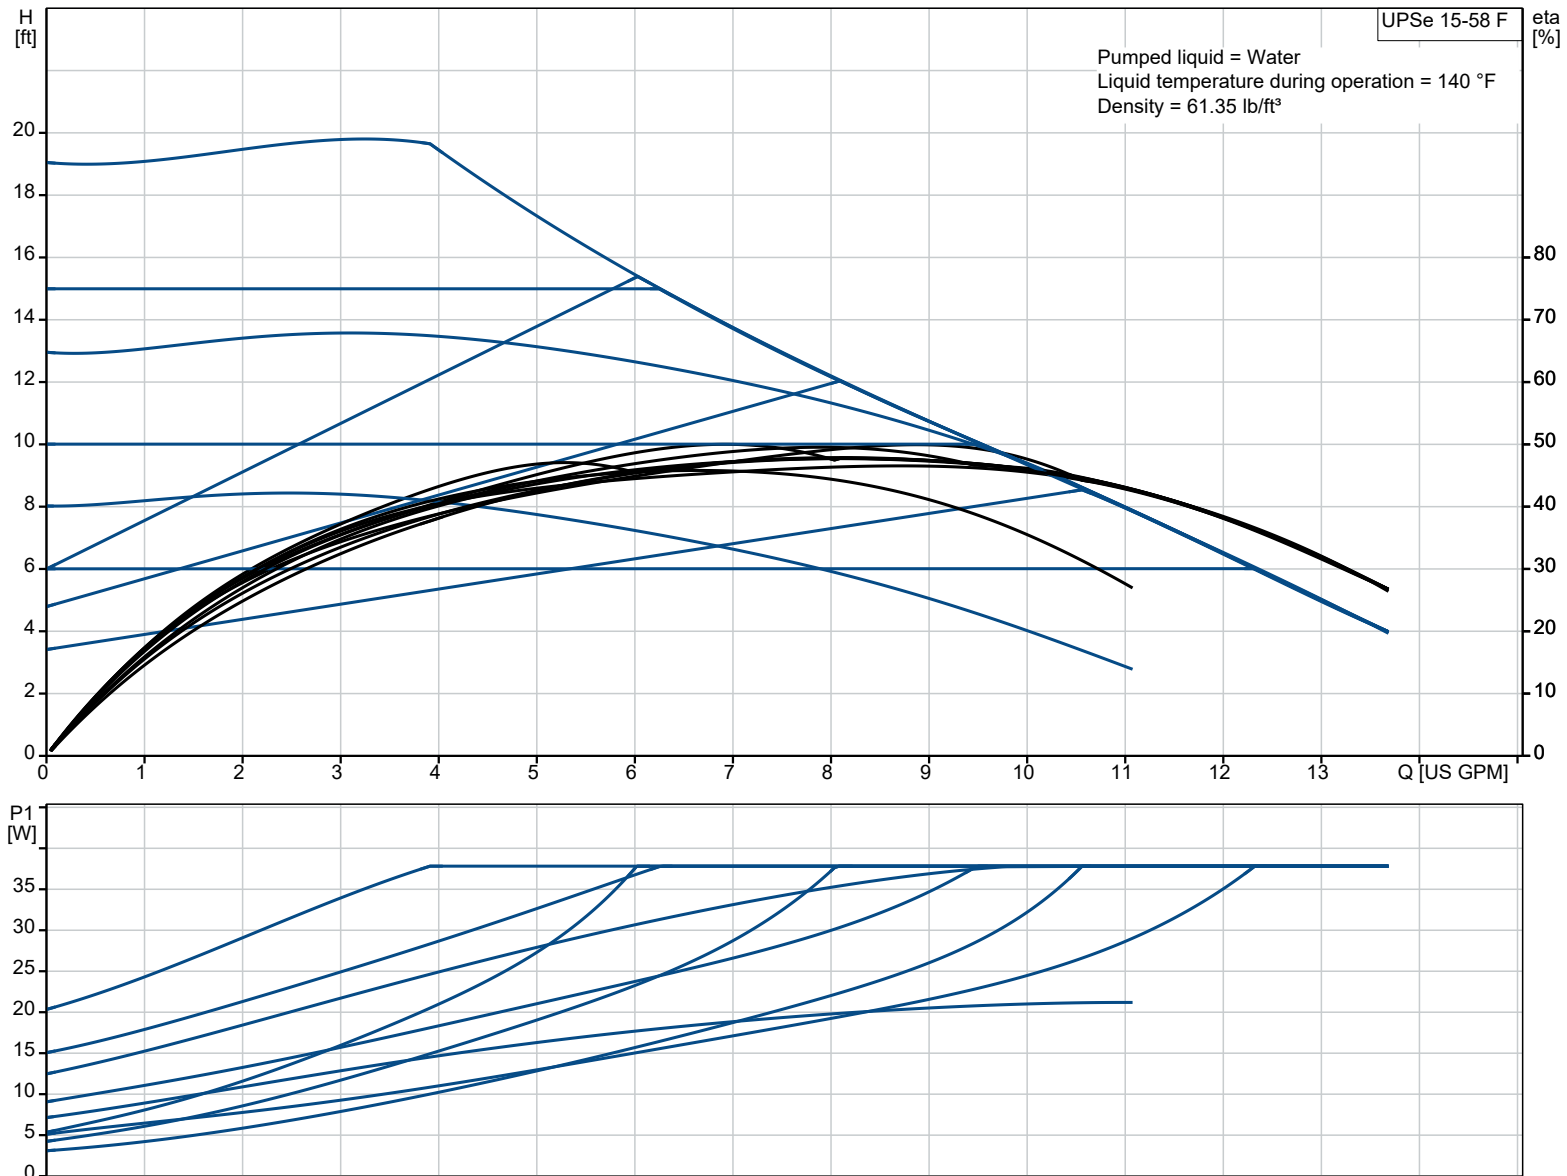

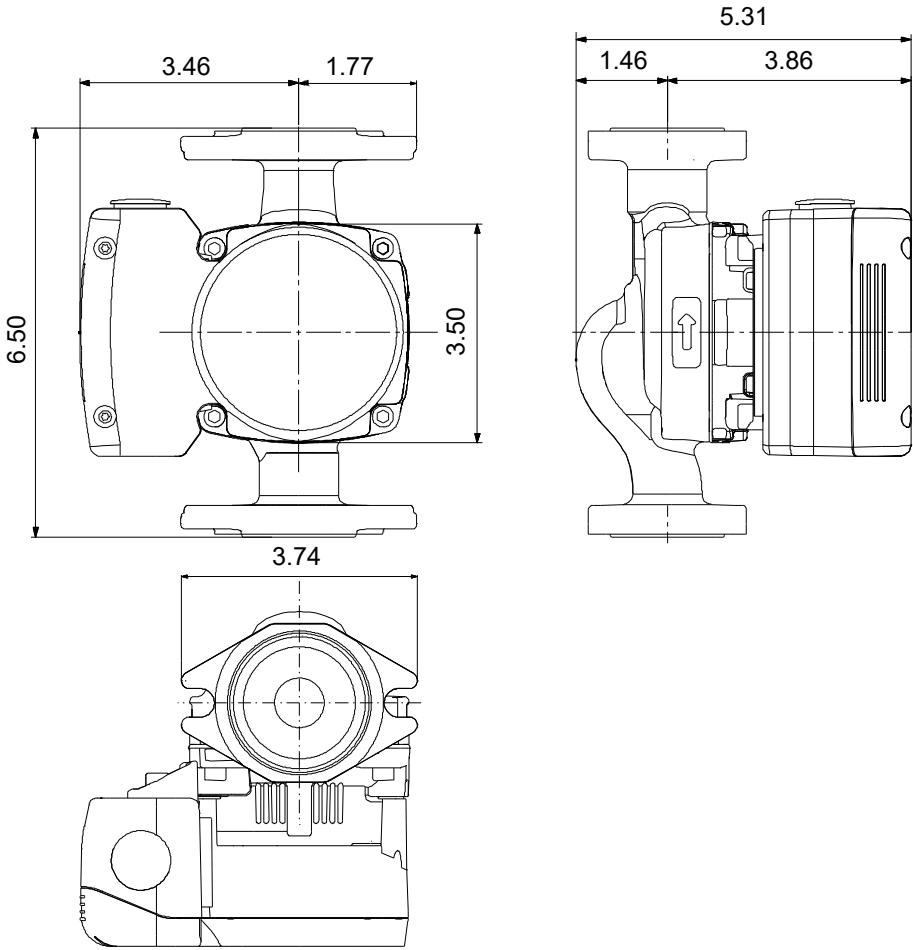

Materials:
Pump housing: Cast iron
Pump housing: ASTM A48-25A
Impeller: Composite

Qty.	Description
1	UPSe 15-58 F  Note! Product picture may differ from actual product Product No.: 92603106 UPSe is a high-efficiency circulator fitted with an electronically commutated motor. It has been designed for circulating liquids in heating systems and offers the highest energy savings on the market. The pump features a wide range of controls, featuring constant-pressure, proportional-pressure and constant-speed curve, each with three settings, making it suitable for almost any heating application. With the use of the Grundfos GO replacement compatibility check, it is easier than ever to make your selection. The new toolless, removeable power connector results in fast and easy installation. Fewer callbacks can be expected due to its robust startup, self-venting ability and dry-running protection. Troubleshooting is also fast and easy by using error codes on the pump user interface. A terminal box with conduit connections is provided for power connection.