



Indoor Comfort Products Brought to You
by the Manufactured Home Experts!

MG2S 96% AFUE 2-Stage MH Gas Furnaces




Unique Manufactured Housing Design with a robust, 19 $\frac{7}{8}$ "W, fully-insulated cabinet to fit the standard MH footprint; the highest-efficiency, HUD-compliant, gas furnace on the market.

2-Stage Gas Valve allows for true, low-fire furnace operation to produce as little as half of the rated full-capacity, preventing short cycling in smaller spaces and reducing energy consumption.

AC-Ready Options include a factory-installed 20"H coil box and an FER-compliant ECM blower with 16 dip-switch speed-settings, for up to 4-Tons nominal cooling. (See Split System Sell Sheets for coil fit and AHRI-matches.)

Simple LP Conversion with an easy-access gas valve regulator and manifold assembly; LP components are factory-supplied with the unit.

Dependable Warranty and Support, handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing Industry.

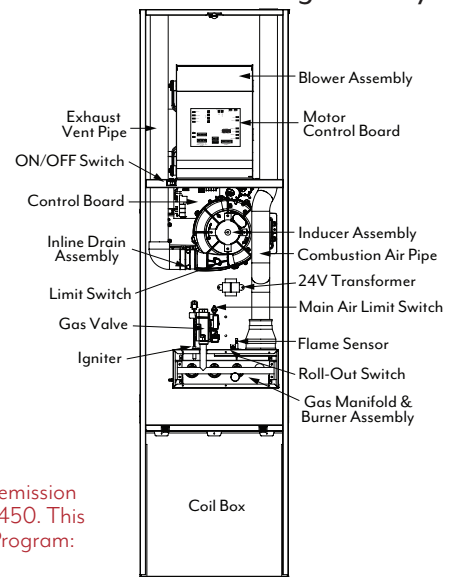

AHRI CERTIFIED®
www.ahridirectory.org

Residential Furnaces
DOE 10 CFR Part 430

This furnace does not meet the SCAQMD Rule 1111 NO_x emission limit (14 ng/j), and is subject to a mitigation fee of up to \$450. This furnace is not eligible for the Clean Air Furnace Rebate Program: www.CleanAirFurnaceRebate.com.



www.stylecrestinc.com | 800.945.4440

MG2S 96% AFUE 2-Stage MH Gas Furnaces

Style Crest Item #	Model #	AHRI Cert. #	Rated Input	Rated Output	Low-fire Input	Low-fire Output	Coil Box, Air Return	Ship L	Ship W	Ship H	Ship Wt.
MG2S-045F	MG2S-045F2ABMI	203049789	45 MBH	43.2 MBH	29 MBH	27.8 MBH	20"H, Front	26 1/2"	21 1/2"	78"	179#
MG2S-060F	MG2S-060F2ABMI	203049796	60 MBH	57.6 MBH	39 MBH	37.4 MBH	20"H, Front	26 1/2"	21 1/2"	78"	179#
MG2S-072F	MG2S-072F2ABMI	203049801	72 MBH	69.1 MBH	47 MBH	45.1 MBH	20"H, Front	26 1/2"	21 1/2"	78"	186#
MG2S-045T ¹	MG2S-045T2ABMI	203049794	45 MBH	43.2 MBH	29 MBH	27.8 MBH	20"H, Top	26 1/2"	21 1/2"	78"	179#
MG2S-060T ¹	MG2S-060T2ABMI	203049799	60 MBH	57.6 MBH	39 MBH	37.4 MBH	20"H, Top	26 1/2"	21 1/2"	78"	179#
MG2S-072T ¹	MG2S-072T2ABMI	203049803	72 MBH	69.1 MBH	47 MBH	45.1 MBH	20"H, Top	26 1/2"	21 1/2"	78"	186#

¹ These items are available as drop-ship only (not stocked), where a non-cancellable order minimum and longer lead-time may apply.

Application Accessories

Item #	Item Description
901083	Backflow Damper, 1-Blade, For Pkgd AC
902095	Bf Damper, 3-Blade, Pkgd AC, Low Profile
904953	3"Ø Pipe, Concentric Vent Term. Kit, US/CA
904106	2-Pipe, Vent Transition Kit (old RJ opening)
901987A	Duct Connector, 11 1/4"x13 1/2"x7 8/8"H, EA (12/Ctn)

Item #	Item Description
901988A	Duct Connector, 11 1/4"x13 1/2"x2"H, EA (12/Ctn)
901989A	Duct Connector, 11 1/4"x13 1/2"x4 1/4"H, EA (6/Ctn)
901990A	Duct Connector, 11 1/4"x13 1/2"x6 1/4"H, EA (6/Ctn)
901991A	Duct Connector, 11 1/4"x13 1/2"x8 1/4"H, EA (4/Ctn)
901992A	Duct Connector, 11 1/4"x13 1/2"x10 1/4"H, EA (3/Ctn)
901993A	Duct Connector, 11 1/4"x13 1/2"x12 1/4"H, EA (3/Ctn)

Direct Vent, Dual-Pipe Specifications

Accepted Pipe Material	ANSI/ASTM Standard
Schedule 40PVC	D1785
PVC-DWV	D2665
SDR-21 & SDR-26	D2241
ABS-DWV	D2661
Schedule 40ABS	F628
Foam/Cellular Core PVC	F891
PolyPro® by DuraVent	ULC-S636

Max Equivalent Pipe Length		
Input	3"Ø In/Outlet	2"Ø In/Outlet
45 MBH	60 ft	30 ft
60 MBH	60 ft	30 ft
72 MBH	60 ft	30 ft

Venting Notes:

- Above table applies from sea level to 2,000ft. For higher elevations, decrease vent pipe lengths by 8% per 1,000ft of additional altitude.
- Subtract 3.5ft for each additional 3"-90° elbow.
- Subtract 2.5ft for each additional 2"-90° elbow.
- Two 45° elbows are equivalent to one 90° elbow.
- One short-radius elbow is equivalent to two long-radius elbows.
- Do not include termination elbows in vent length calculation.
- Only listed pipe materials are approved for use with MG2S furnaces.

