

130CTK PRO-FIT[®] 1

MANSFIELD[®]

Complete Toilet Kit, Round Front, Vitreous China, Two-Piece Toilet

FEATURES

- Complete toilet kit (CTK)
- 3-bolt SmartFasten[™] tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- Round front bowl
- 2' flush tower
- Anti-siphon ballcock
- 12" rough-in
- Model 40 chrome-plated, plastic trip lever
- 2" glazed trapway
- The Mansfield[®] limited lifetime warranty
- Available in White, Bone and Biscuit



MODEL 130CTK

Toilet seat included

Complete toilet kit



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
130CTK	Round front, two-piece toilet kit. Includes: toilet seat, wax toilet ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included. Specify color.	
130	Round front, toilet bowl only. Less toilet seat. Specify color.	
160	Tank and cover only with left hand, front-mount, chrome-plated, plastic trip lever. Less supply. Specify color.	
SB100	Round, closed front, plastic toilet seat and cover.	

TANK TRIM & REPLACEMENT PARTS

40	Trip lever - chrome-plated, plastic trip lever, left hand
211-1112	Flush tower
08ULF-1112	Anti-siphon ballcock
630-0030	Replacement flush valve seal
160-LID	Tank lid



130CTK PRO-FIT[®] 1

MANSFIELD[®]

Complete Toilet Kit, Round Front, Vitreous China, Two-Piece Toilet


SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
130CTK	Round front (1.6 gpf / 6.0 lpf) two-piece toilet kit.	

MATERIAL	Vitreous China	TRAP DIAMETER	2'
WATER PRESSURE RANGE	20 to 80 PSI	TRAP SEAL	2-5/8'
FLUSH SYSTEM	2' Flush Tower	SHIPPING WEIGHT	Model 130CTK - 85 lbs. (38.2 kg)
WATER USAGE	1.6 gpf / 6.0 lpf	WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year
WATER SURFACE AREA	8' X 9'		
ROUGH-IN	12'		
MAP RATING	800 grams		

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

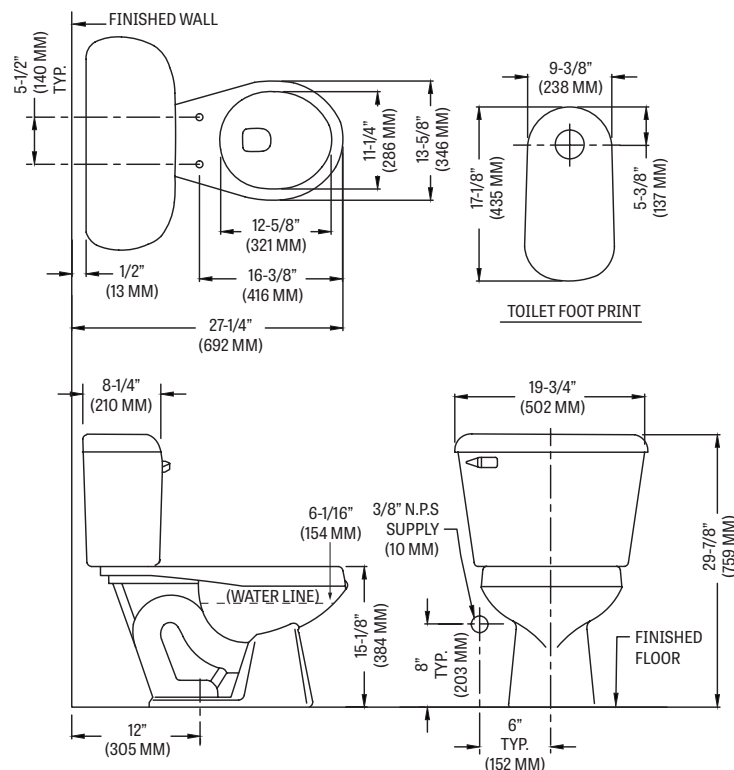

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

