

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

G2CR14X Matte Black 1/4 Turn Straight Stop - Compression x Compression

Use: For use in potable water distribution systems in accessible locations only.

Design Features:


- Attractive matte black finish.
- Positive 1/4 turn shut off provides easy on/off operation.
- Easy-to-remove handle helps protect against accidental operation during rough-ins.
- 100% leak-tested.
- Precision-machined brass ball is specially engineered and mated with PTFE seats to provide smooth operation.
- No-lead brass material meets compliance for safe drinking.

Operating Specifications:


Temperature: 40°- 160° F

Pressure: 125 PSI maximum

STOP MATERIAL SPECIFICATIONS	
Body	Brass, plated
Stem	Brass
Ball	Brass, plated
Seats	PTFE
O-ring	Rubber
Handle	ABS, plated
Handle Screw	Stainless steel, plated
Compression Nut	Brass, plated
Compression Sleeve	Brass

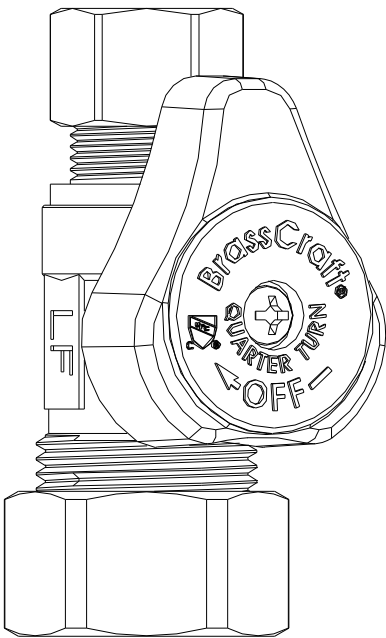

G2CR14X Matte Black 1/4 Turn Straight Stop - Compression x Compression

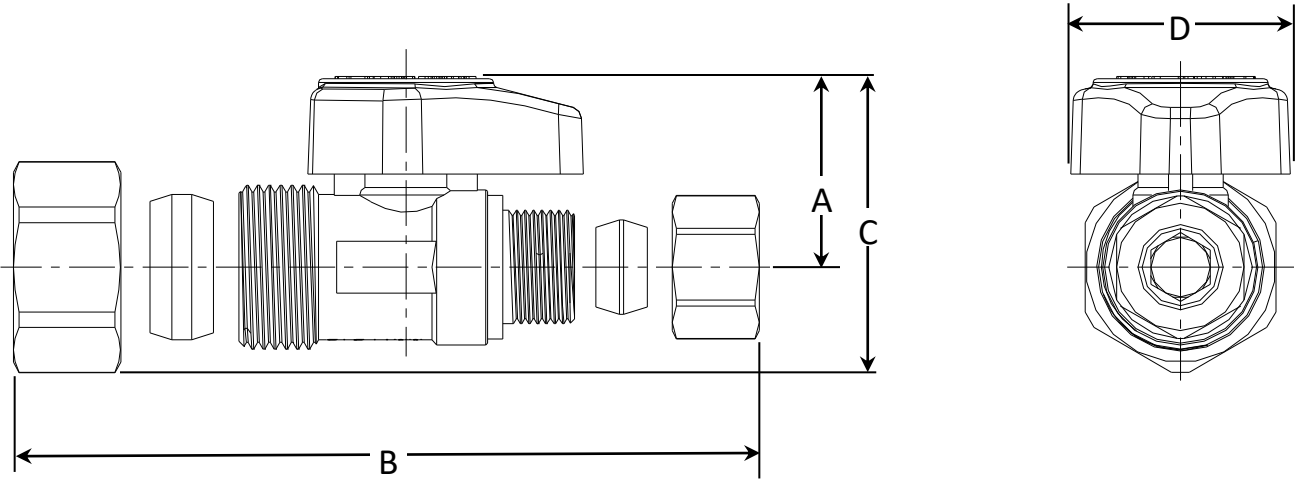

PART DIMENSIONS (Inches)				
Model	DIM A	DIM B	DIM C	DIM D
G2CR14X	0.94	2.32	1.46	1.09

Part Listing:

- ☐ G2CR14X MBD 1/2" Nom Compression x 3/8" OD Compression, Matte Black Finish, Blister Card

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)

